


256

Levelling support

for a container with a total weight of up to 10 t, foldable

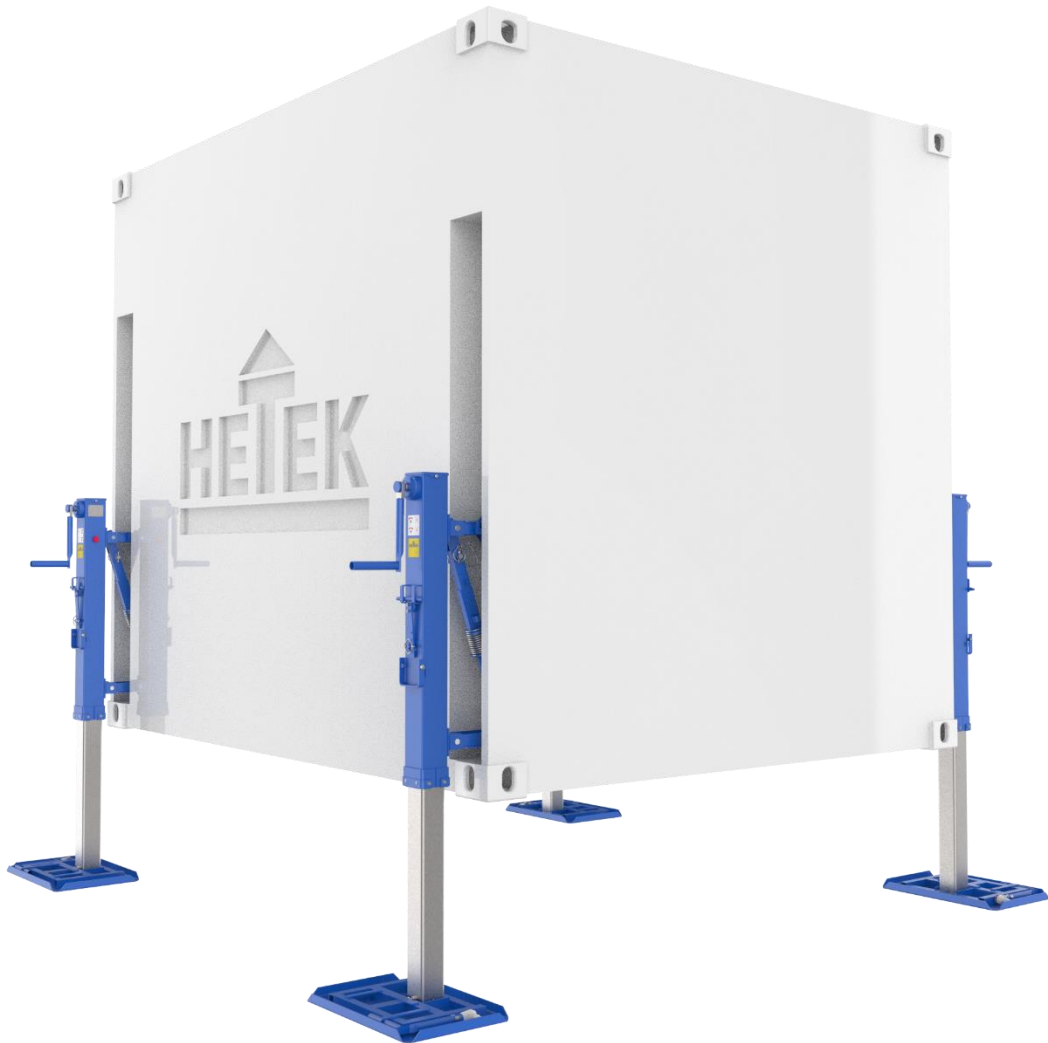

The leveling jacks series 256 with manual drive can be folded for transport into the niche. As a result, the containers outside dimensions are not exceeded and transport costs can be optimized. The tactical times for bringing into operation of the container can be reduced by this integrated solution.

- Installation in a niche provided for this purpose.
- Can be folded onto the shelter for transport.
- Drive via ball screw, low maintenance.
- Manual operation with plug-in hand crank.
- Removable foot plates, hand cranks.

256

Levelling support

for a container with a total weight of up to 10 t, foldable

Model	256-T01
Maximum load capacity in the system	10.000 kg
Maximum load capacity per support	5.000 kg
Lifting height	650 mm
Overall height	1.020 mm
Weight per support	ca. 59 kg
Allowed ground inclination	3,5° - standard
Wind load	20 m/s (72 km/h) - standard
Operating temperature range	-32°C - +49°C - standard

