


# 239

## Levelling supports with electric drive for containers up to max. 9 t total weight

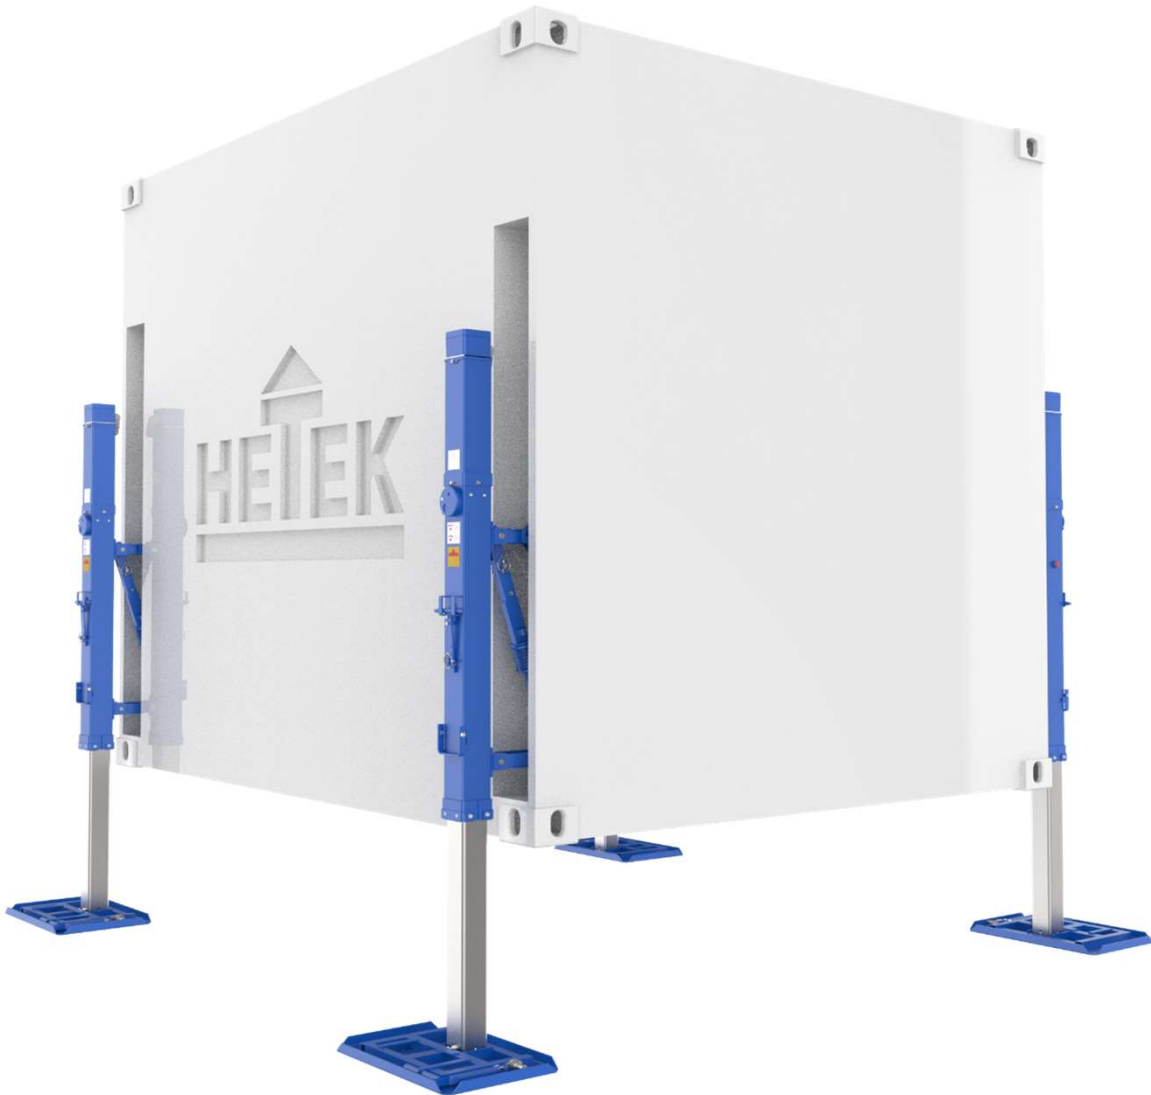

The Levelling support 239 is folded for transport into the niche, so that the container outside dimensions are not exceeded and transport costs optimized.

When setting up the tactical bringing into operation times of the container can be reduced by this integrated solution.

- Installation in a niche provided for this purpose.
- Can be folded onto the shelter for transport.
- Drive via ball screw, low maintenance.
- Manual operation with plug-in hand crank.
- Optionally with electric motors and automatic levelling control (0° or ground parallel).
- Removable foot plates, hand cranks.

# 239

## Levelling supports with electric drive for containers up to max. 9 t total weight

Model	239-T02
Maximum load capacity in the system	up to 9.000 kg
Maximum load capacity per support	up to 4.500 kg
Lifting height	700 mm - standard
Maximum lifting height (under reduced conditions)	up to 1.000 mm
Allowed ground inclination	3,5° - standard
Control tolerance for level control	±0,25° absolute
Wind load	20 m/s (72 km/h) - standard
Operating temperature range	-32°C - +49°C - standard
Power connection for electric drive	24 VDC

